


PART NUMBERING SYSTEM



Conn Type	Configuration	Operating Mode	Voltage	Function Select	Function Select	Function Select	Function Select	PerfomnceSelect	Option
RP : SMA	SPST : 11	L : Latching	A : 12V	I : Indicator	T : TTL	L : Termination	0 : 18 ~20 GHz	D : D-Sub	Null : Normal
RP1 : N	SPDT : 12	LS : Latching+ Self-Cutoff	B : 15V	0 : NO	P : Low PIM	0 : No	1 : <3 GHz	S : Solder Pin	C : Customized
RP2 : 7/17(DIM)	TRAN : 22	F : Failsafe	C : 24V		0 : NO		2 : 3 GHz	K : High Performance	P : Positive Common
RP3 : TNC	2P3T : 23	O : Normally Open	D : 28V		D : Decoder		3 : 6 GHz	Z : Special	
RP4 : SMB	SP3T : 13		E : 48V				4 : 12 GHz		
RP5 : F	SP4T : 14		Z : Special				5 : 26.5 GHz		
RP6 : SMT	SP5T : 15						6 : 40 GHz		
RP7 : Special	SP6T : 16								
RP8 : K(2.92mm)	SP7T : 17								
	SP8T : 18								
	SP9T : 19								
	SP10T : 1A								
	SP12T : 1C								

SPECIFICATION

Connector Type	SMA
Form Factor	SP8T
Action	Normally Open
Actuation Voltage Available	12 ± 0.5 VDC
Actuation Current Max	290 mA
Indicator	No
TTL Logic	ON STATE: N/A OFF STATE: N/A
Termination	No
Impedance	50 Ohms
Frequency Range	DC–18 GHz
Control I/O	D-Sub

ENVIRONMENTAL AND PHYSICAL CHARACTERISTICS

Operating Temperature	-25°C to 65°C
Vibration (MIL-STD-202 Method 214, Condition D, non-operating)	10 g's RMS
Shock (MIL-STD-202 Method 213, Condition D, non-operating)	500 g's
Standard Actuator Life	5,000,000 cycles
Actuator Life with additional features	1,000,000 cycles
Switching Time	20 ms (max.)
Humidity (Moisture Seal)	Available



RAPIDTEK
RF COAXIAL SWITCHES

PERFORMANCE CHARACTERISTICS

Frequency	DC – 6 GHz	6 – 12.4 GHz	12.4 – 18 GHz
Insertion Loss, dB, Max.	0.3	0.40	0.60
Isolation, dB, Min.	70	60	60
VSWR, Max.	1.30:1	1.40:1	1.60:1

PINOUT & LOGIC TABLE

Pin No.

1.	INPUT+ 1	5.	INPUT+ 5	9~14.	N/C
2.	INPUT+ 2	6.	INPUT+ 6	15.	-COM
3.	INPUT+ 3	7.	INPUT+ 7		
4.	INPUT+ 4	8.	INPUT+ 8		


TERMINALS D-SUB PIN ASSIGNMENT	RF PATH							
	J1	J2	J3	J4	J5	J6	J7	J8
1 (INPUT+)	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF
2 (INPUT+)	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF
3 (INPUT+)	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF
4 (INPUT+)	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF
5 (INPUT+)	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF
6 (INPUT+)	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF
7 (INPUT+)	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF
8 (INPUT+)	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON

15 -COM




RAPIDTEK
RF COAXIAL SWITCHES

SCHEMATIC

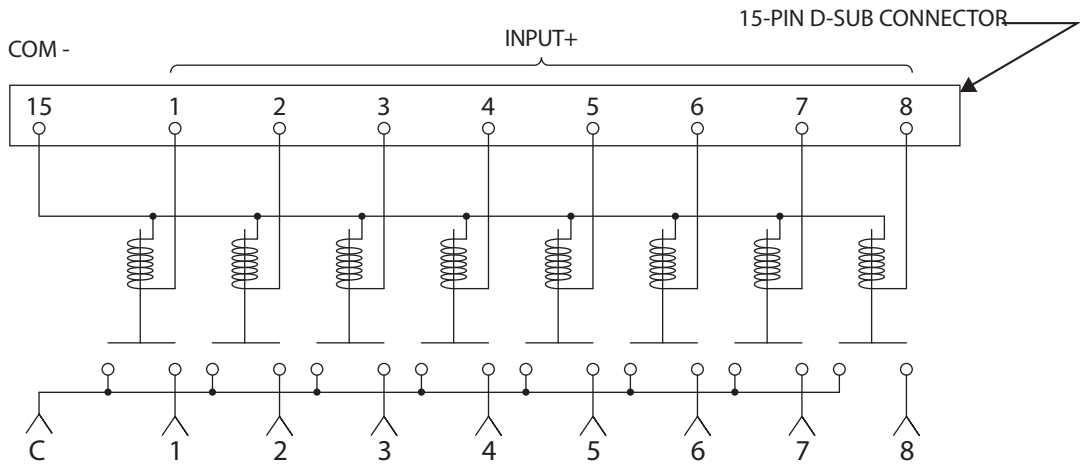

STANDARD DIMENSIONS

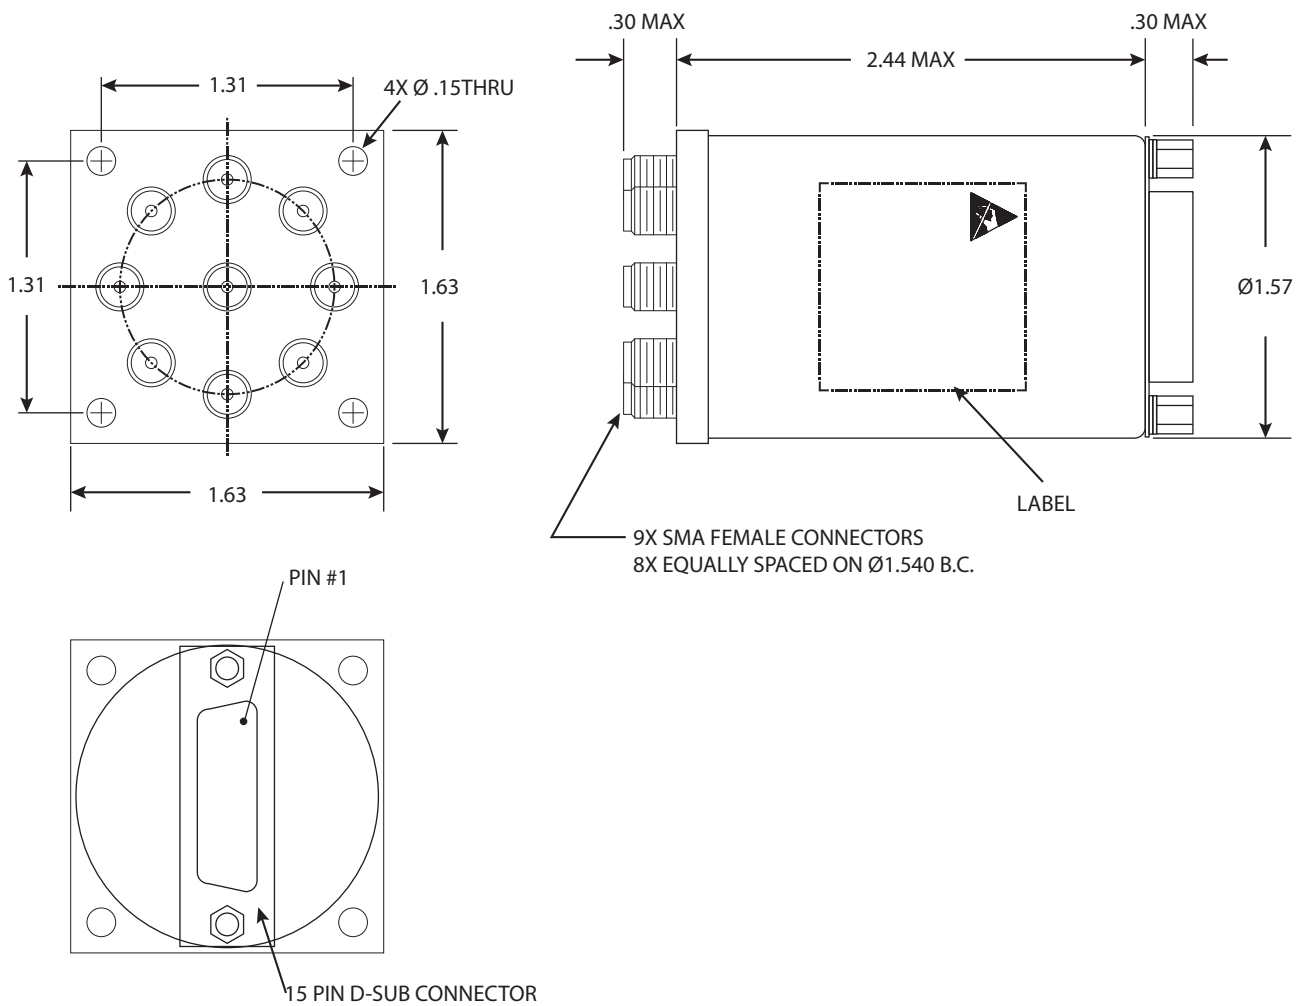

(Unit : inch)



RAPIDTEK
RF COAXIAL SWITCHES