


**PART NUMBER DESCRIPTION**

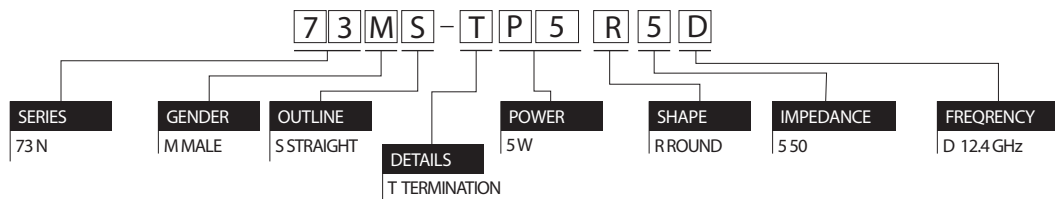

**MATERIAL AND FINISH**

	MATERIAL	FINISH
CENTER CONTACT	BRASS	GOLD
INSULATOR	PTFE	
OUTER CONTACT	BRASS	NICKEL


**MECHANICAL**

	TEST CONDITION	SPECIFICATIONS
FORCE TO ENGAGE	N/A	6 in-lbs Max
FORCE TO DISENGAGE	N/A	6 in-lbs Max
SERVICE LIFE	N/A	1000 times Min

**ELECTRICAL**

	TEST CONDITION	SPECIFICATIONS
IMPEDANCE	DC ~ 12.4 GHz	50 Ohms
VSWR	DC ~ 12.4 GHz	1.1 Max
POWER RATING	DC ~ 12.4 GHz	5 W

**STANDARD DIMENSIONS**

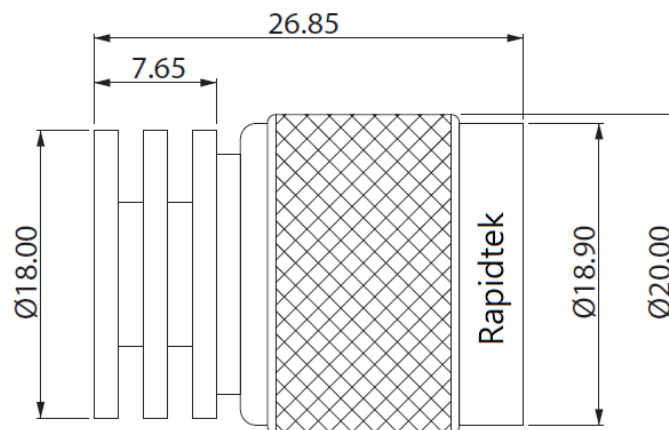

**RAPIDTEK**  
RF COAXIAL TERMINATIONS