


BNC (M) TO BNC (M) CABLE

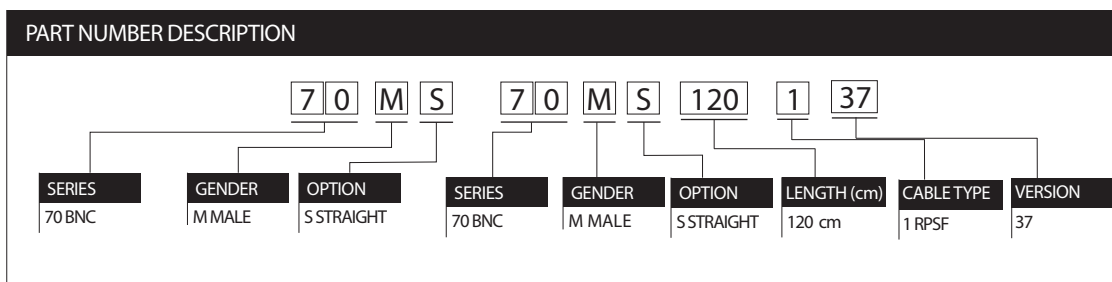

MATERIAL AND FINISH


	DETAIL
CABLE	RPSF
CONNECTOR A	BNC MALE
CONNECTOR B	BNC MALE

MECHANICAL AND ENVIRONMENTAL

	SPECIFICATIONS
NOMINAL OUTER DIAMETER	2.15 mm
MIN BEND RADIUS	6 mm
TEMPERATURE RANGE	-65 °C ~ 165 °C
CABLE RETENTION	20lbs Min. Or When Cable Gets Broken

ELECTRICAL


	TEST CONDITION	SPECIFICATIONS
IMPEDANCE	DC~ 4 GHz	50 Ohms
VSWR	DC~ 4 GHz	1.3 Max
INSERTION LOSS	DC~ 4 GHz	2.7 Max

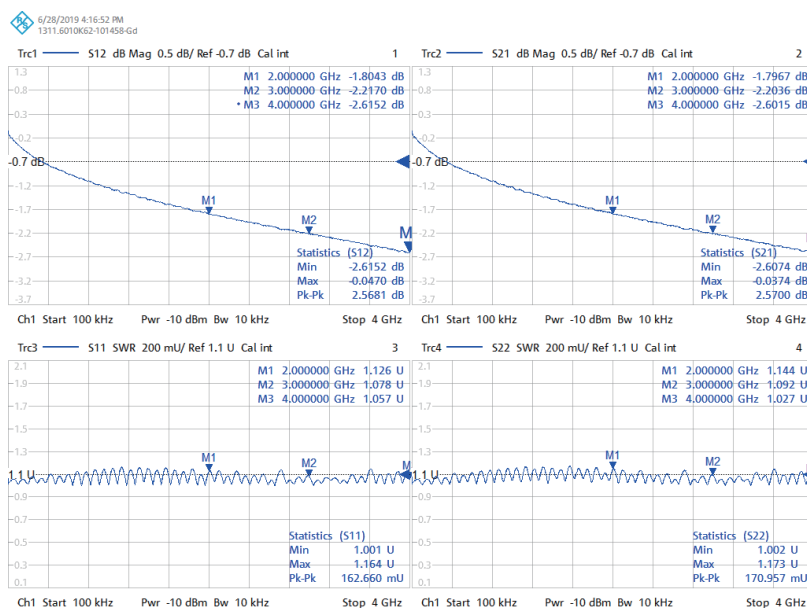

RAPIDTEK
RF COAXIAL CABLE

Rapidtek Magnetic Devices Inc.
http://www.rapidtek.net
Tel : 02 - 8698 - 1068
Fax : 02 - 8698 - 1018
17F, No.75, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 22101, Taiwan

STANDARD DIMENSIONS

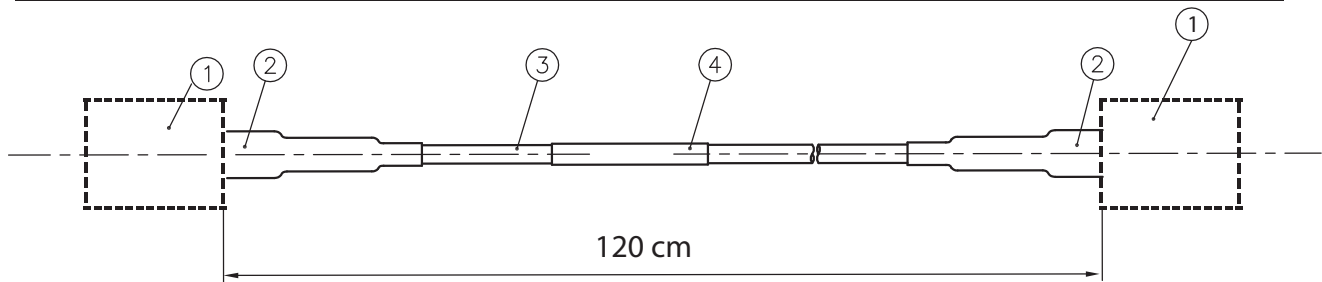

- 1 BNC (M) CONNECTOR
- 2 HEAT SHRINK TUBE
- 3 CABLE
- 4 LABEL

CABLE



Connector parts	Material	Diameter
Inner Conductor	SCCS	0.51 mm
Dielectric	FEP	1.53 mm
Jacket	FEP	2.53 mm



RAPIDTEK
RF COAXIAL CABLE

Rapidtek Magnetic Devices Inc.
<http://www.rapidtek.net>
Tel : 02 - 8698 - 1068
Fax : 02 - 8698 - 1018

17F, No.75, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 22101, Taiwan