

MATERIAL AND FINISH

	MATERIAL	FINISH
CENTER CONTACT	BRASS	15μ" GOLD
INSULATOR	PTFE	WHITE
OUTER CONTACT	STAINLESS	PASSIVATED

MECHANICAL


	TEST CONDITION	SPECIFICATIONS
FORCE TO ENGAGE/DISENGAGE	N/A	2 in-lbs Max
COUPLING NUT RETENTION	60mm/min	60 lbs Min
COUPLING PROOF TORQUE	N/A	15 in-lbs Max

ELECTRICAL

	TEST CONDITION	SPECIFICATIONS
IMPEDANCE	DC ~18 GHz	50 Ohms
VSWR	DC ~18 GHz	1.2 Max
INSERTION LOSS	DC ~18 GHz	0.2dB Max



STANDARD DIMENSIONS

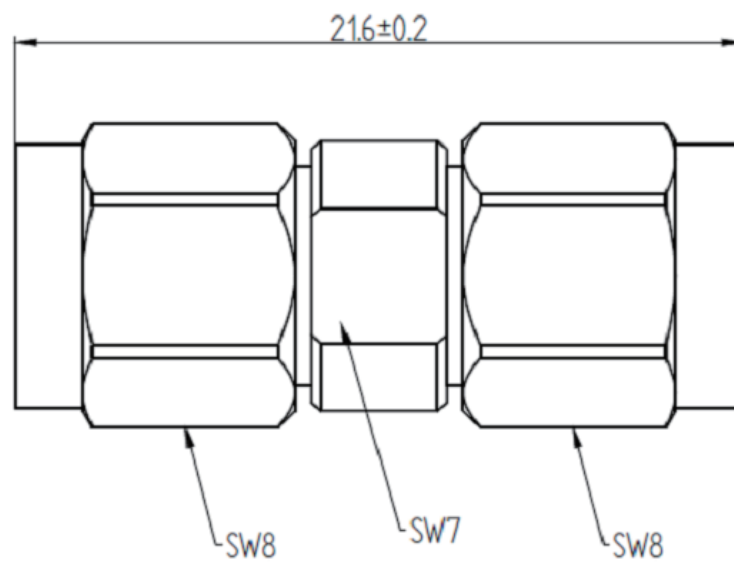

78M-78MIS5C-ST



RAPIDTEK
RF COAXIAL ADAPTOR

Rapidtek Magnetic Devices Inc.
<http://www.rapidtek.net>
Tel : 02 - 8698 - 1068
Fax : 02 - 8698 - 1018
17F, No.75, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 22101, Taiwan

HKG0200310080026
TWN0202310080012
Ver.02_20170120